

# POTASSIUM TITANATE (HW)

FRICITION MODIFIER

WHISKER



TAM Ceramics has recently developed a high aspect ratio or highly whisker grade of Potassium Titanate for the friction industry at the request of friction formulators. This version of potassium titanate demonstrates TAM's development capabilities and ability to customize for the friction market.


- A cost effective alternative to the existing fibrous Potassium Titanate products currently utilized in the friction industry
- A high quality product produced in an ISO 9001 facility
- Large or small quantities with relatively short lead times

## PROPERTIES

### POTASSIUM TITANATE (HW)

- High aspect ratio morphology
- Thermally resistant
- Wear resistant
- Typical size range (1 $\mu$ m-150 $\mu$ m)
- Chemically stable
- Typical pH in solution (7-10)

## CLEMEX IMAGE

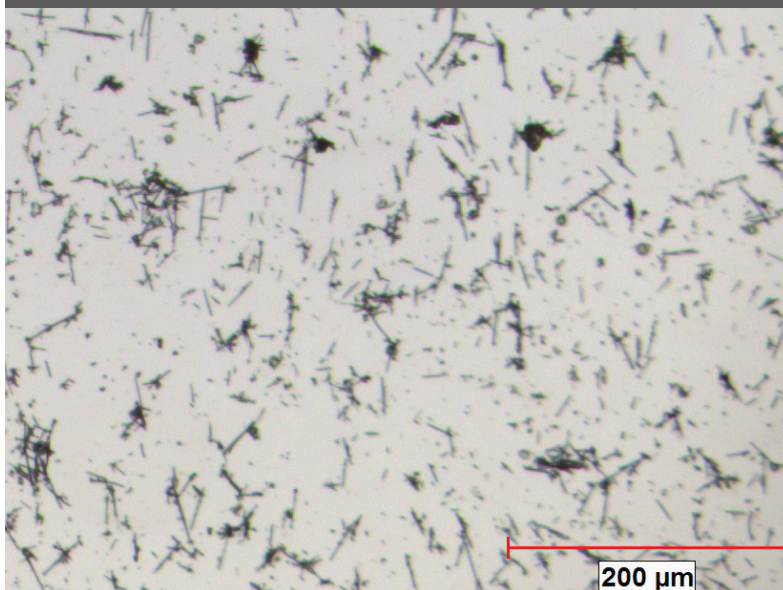

## QUALITY STATEMENT

TAM Ceramics is an ISO 9001 company and is committed to employee & community safety, environmental responsibility, exceeding customer expectations, continuous improvement, quality and value.



4511 Hyde Park Boulevard  
Niagara Falls, NY 14305

customer.service@tamceramics.com  
<http://www.tamceramics.com>  
(716) 278-9403

NOTE: the statements made herein are based on TAM research and the research of others and are believed to be accurate. No guarantee of their accuracy is made and the products discussed are sold without warranty, expressed or implied, and upon the condition that purchasers shall make their own tests to determine the suitability of such products for their particular uses. Likewise statements made concerning the possible uses of these products are not intended as recommendations to use these products in infringement of any patents.